

Open Research Online

The Open University's repository of research publications and other research outputs

DARBS: A Distributed Blackboard System

Conference or Workshop Item

How to cite:

Nolle, L.; Wong, K.C.P. and Hopgood, A.A. (2001). DARBS: A Distributed Blackboard System. In: 21st SGES International Conference on Knowledge Based Systems and Applied Artificial Intelligence, 10-12 Dec 2001, Cambridge, UK.

For guidance on citations see [FAQs](#).

© [\[not recorded\]](#)

Version: [\[not recorded\]](#)

Copyright and Moral Rights for the articles on this site are retained by the individual authors and/or other copyright owners. For more information on Open Research Online's [data policy](#) on reuse of materials please consult the policies page.

oro.open.ac.uk

DARBS: A Distributed Blackboard System

L. Nolle¹ K.C.P. Wong² A.A. Hopgood³

¹Oxford Research Unit, The Open University
Berkley Road, Oxford, OX1 5HR, UK

²Faculty of Technology, The Open University
Walton Hall, Milton Keynes, MK7 6AA, UK

³Department of Computing, The Nottingham Trent University
Burton Street, Nottingham, NG1 4BU, UK

Abstract

Prior to this work, an algorithmic and rule-based blackboard system (ARBS) had been developed over a ten-year period. ARBS benefited from a versatile rule structure and the ability to mix computational styles either as separate knowledge-sources or by embedding algorithms within rules. It was a serial system – any knowledge source that was able to contribute had to wait its turn. We report here on a new distributed system, DARBS, in which the knowledge sources are parallel processes. Based around the client/server model, DARBS comprises a centralised database server, i.e. the blackboard, and a number of knowledge source clients. As the clients are separate processes, possibly on separate networked computers, they can contribute to the solution of a problem whenever they have a contribution to make. DARBS therefore achieves the well-established but elusive ideal of opportunism. It behaves as a distributed agent-based system, with the proviso that all communication is via the blackboard. DARBS is currently being applied to automatic interpretation of non-destructive evaluation (NDE) data and control of plasma deposition processes.

1 Introduction

Over the years, ARBS, an in-house rule-based system, developed at the Open University, has been successfully applied to a number of projects for solving engineering problems, ranging from non-destructive evaluation (NDE), controlling plasma deposition processes and controlling telecommunication networks [1-3]. However, ARBS had some limitations. Firstly, it was written in Pop11, which limited its wider acceptability. Secondly, it was originally implemented as a single process, i.e. only one knowledge source could be active at one time. Each knowledge source had a set of preconditions that needed to be fulfilled before a knowledge source could be activated. A separate control module scheduled the knowledge sources using a first-come, first-served strategy. This was clearly a violation of the opportunistic idea of a Blackboard system [4]. In order to overcome this limitation, a distributed architecture has been used. Client/server technology is employed and the communication is through TCP/IP. The new system consists of a Blackboard Server (BS) and a number of modular Knowledge Source Clients. Workloads are distributed to a number of clients which are rule-based modules or other AI systems with specific knowledge in various areas. These clients communicate by adding or removing information to the blackboard. The concept of a blackboard system is analogous to a group of experts discussing a problem by writing and updating information onto the blackboard. The new system is known as the Distributed Algorithmic and Rule-based Blackboard System (DARBS).

2 ARBS

ARBS was originally developed in 1990 with funding from the UK Engineering and Physical Sciences Research Council (EPSRC) and has been refined during several subsequent research projects [1-3,5]. ARBS was written in Pop11 and designed to operate under Unix. It is a blackboard system in which specific tasks are handled by separate knowledge sources that communicate by adding information to an area of the blackboard. Rule-based, procedural, neural networks and genetic algorithm knowledge sources have been successfully integrated into the blackboard system (see Figure 1). The implementation in Pop11 compromised performance. For tackling increasingly complicated engineering problems, it was decided to re-design a new distributed version of the software, DARBS, implemented in standard C++.

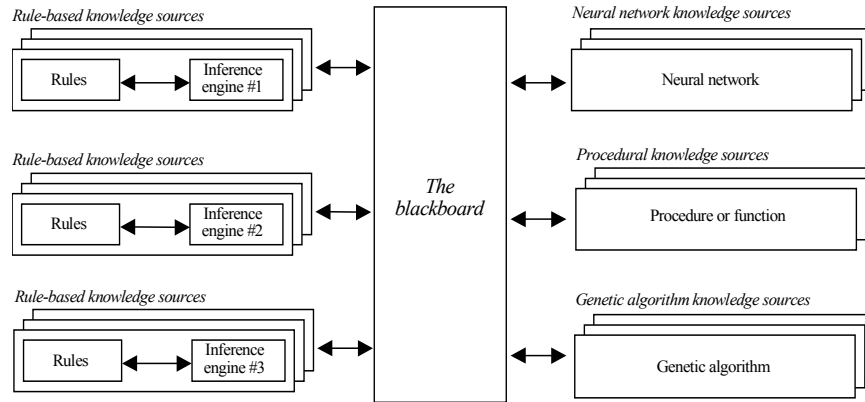


Figure 1 - The Blackboard architecture of ARBS.

3 DARBS

The major improvement of DARBS compared with ARBS is the introduction of parallelism. The knowledge of the problem domain is distributed to a number of client knowledge sources. These knowledge sources can be seen as experts having knowledge in specific areas. The clients are independent and can only communicate through the blackboard. Figure 2 shows the architecture of the blackboard system.

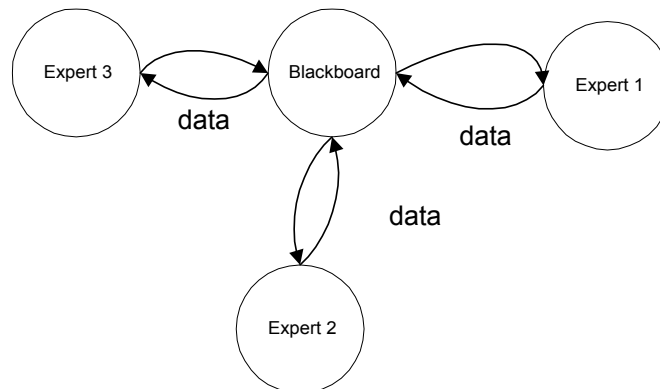


Figure 2 - The architecture of DARBS.

3.1 Blackboard and Knowledge Sources

The blackboard has the appearance of a database. The blackboard can be divided by the knowledge sources during run-time into separate partitions for categorising information. The number of partitions is limited only by the hardware and the operating system used. The knowledge sources can only communicate through the blackboard. All the experts have an equal chance to access the information therein, i.e. on a first-come-first-served basis.

3.2 Parallel Processing

In DARBS, a single blackboard and a number of knowledge sources co-operatively solve a problem. The knowledge sources observe the blackboard constantly and activate themselves when the information interests them. All the knowledge sources run in parallel. Whenever the content of a partition of the blackboard is changed, the blackboard server will broadcast messages to other knowledge sources. The knowledge sources themselves will decide how to react to this change. In other words, the rule-writer should consider how to deal with these broadcast messages when a rule is designed. The requests for reading and writing to the blackboard are atomic, i.e. these requests are non-interruptible. If a new request arrives before the current one has been finished, the new request will be put into a queue for later processing.

3.3 Client/Server Architecture using TCP/IP

DARBS uses client/server technology. The blackboard acts as a server and the knowledge sources act as clients. The communication is through standard TCP/IP (Figure 3). The Internet Protocol (IP) handles the routing from one computer to another, while the Transmission Control Protocol (TCP) handles sequencing, flow control and retransmission to ensure successful delivery [6]. With this approach, the server and clients operate as independent processes. The inter-process communications use the Internet sockets, so that DARBS can be operated over a wide area network (WAN) such as the Internet (Figure 4).




Figure 3 - Client/server communication using UNIX sockets.

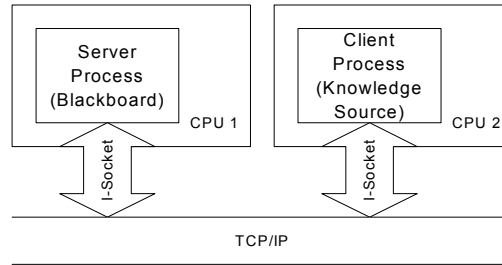


Figure 4 - Client/server communication using INTERNET sockets.

The system is platform-independent. For example, the blackboard server can be run on a Unix machine and knowledge source clients can be run on a number of MS Windows, Mac, Linux and Unix machines. Another advantage of this approach is that the knowledge source client can be written in Java as a web-based applet and thus a knowledge source client can be operated under a web browser and no installation is required.

4 DARBS Knowledge Sources

DARBS integrates various computer techniques into one system. Particular tasks are co-operatively conducted by knowledge sources with specialised expertise. Rule-based and procedural knowledge sources have been integrated into DARBS and neural networks and genetic algorithm knowledge sources will be developed at later stage.

4.1 Knowledge Source Structure

Each knowledge source is encapsulated in a record containing seven fields (Figure 5). The first field specifies the knowledge source name and the second field is the knowledge source type. It can be either rule-based, procedural, neural network or other. For rule-based knowledge sources, there are fields for specifying inference mode (third field) and rules (fourth field). Field 5 is an activation flag that allows individual knowledge sources to be switch on or off. Field 6 is a set of preconditions, which must be satisfied before the knowledge source can be activated. The precondition may comprise sub-conditions joined with Boolean operators AND and OR. Consequently, an additional action field (Field 7) states what actions are to be performed before the knowledge source is deactivated. For procedural, neural network and other non rule-based knowledge sources, the functions and procedures are listed in the action field.

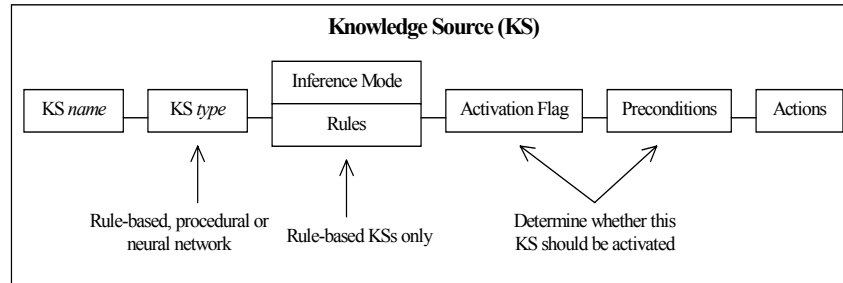


Figure 5 - Knowledge Source Structure.

In DARBS, all knowledge sources run in parallel. They constantly check the blackboard for activation opportunity. Knowledge sources can read data from the blackboard simultaneously. However, to avoid deadlock, only one knowledge source is allowed to write data to the same partition of the blackboard at one time. Whenever the content of the blackboard changes, the blackboard server broadcasts a message to all knowledge sources. The knowledge sources themselves decide how to react to this change, e.g. restart the knowledge source. With this approach, knowledge sources are completely opportunistic, i.e. activating themselves whenever they have some contributions to make to the blackboard.


4.2 Rule Structure

In DARBS, rules can be used for looking up information on the blackboard, making deductions about that information and posting new information on the blackboard. The rule structure is simple, but complex conditions and conclusion can be constructed (Figure 6). Rules consist of four fields. The first field is the rule number. It is followed by a set of conditions and conclusions. Like the precondition field in knowledge sources, the condition may comprise sub-conditions joined with Boolean operators AND and OR. The condition must be satisfied before the conclusion field can be activated. In the conclusion section, information can be added to or deleted from the blackboard and local and external functions can be called. Finally, the last field is for explanation – it is used by the rule-writer to explain why the rule is executed.

4.3 Inference Engines

DARBS offers two types of inference engines, which are based on the principle of multiple and single instantiation of variables [5]. Within a rule, sharing of information can be achieved by employing variables (in contrast to the sharing information between rules, which is carried out via the blackboard). Under multiple instantiation, all possible matches to the variables are found and acted upon with a single firing of a rule. In contrast, only the first match to the variables

is found when single instantiation is used. Usually, the multiple instantiation inference mechanism is preferred because it is straightforward and efficient. However, single instantiation might be preferred in circumstances where a time constraint is imposed [2]. An example of a rule is shown in Figure 6.

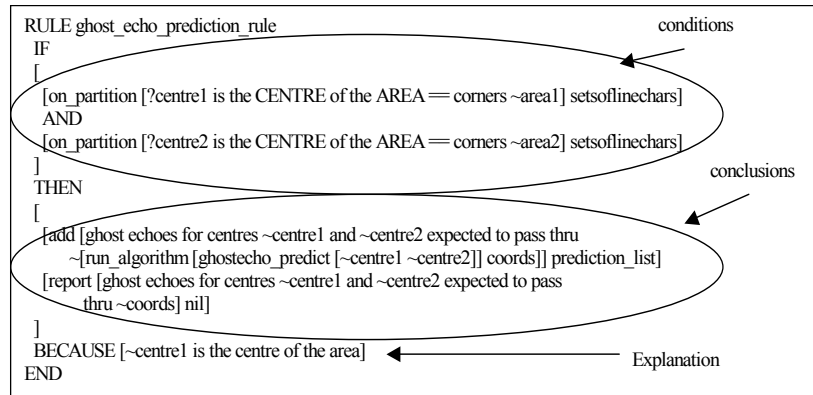

Where:
The match variable, which is prefixed by a “?”, will be looked up from the blackboard;
The insert variable, which is prefixed by a “~”, will be replaced by the instantiations of that variable.

Figure 6 - A typical DARBS rule.

5 Applications

DARBS is currently employed for automatically interpreting ultrasonic non-destructive evaluation (NDE) data and controlling plasma deposition processes.

5.1 Ultrasonic Non-Destructive Evaluation

Previously, ARBS had been successfully applied to the interpretation of B-scan images from weld defects in flat ferritic steel plates [1]. However, the geometry of the specimen was relatively simple compared with real industrial components. Extensive work is being undertaken for interpreting ultrasonic images of turbine disks and blades, provided by Rolls-Royce. New knowledge sources and rules are under development to cope with the more complex geometric reflections. Artificial neural networks will be developed to classify type of defects.

Figure 7 shows a block diagram of the ultrasonic NDE automatic interpretation system, which is currently under development. Ultrasonic images are loaded to the blackboard for interpretation by rule-based knowledge sources. The stages of

interpretation are displayed to the operator through the graphical user interface. The operator can also send commands to the knowledge sources.

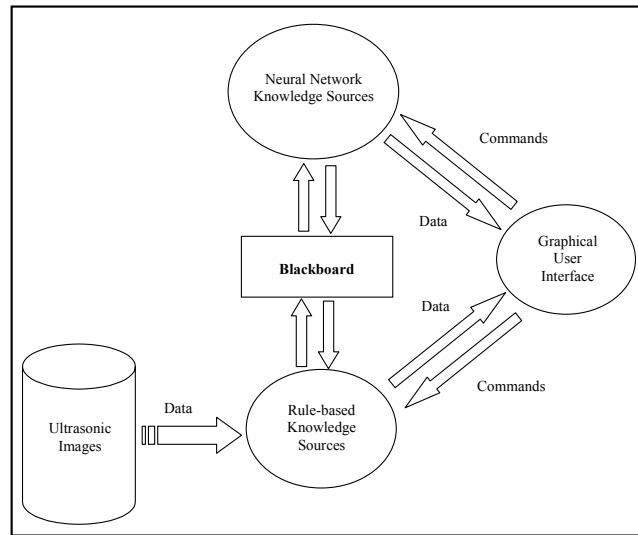


Figure 7 - DARBS-based ultrasonic NDT automatic interpretation system.

5.2 Plasma Process Control

Previous work has involved using artificial intelligence (AI) techniques to control plasma deposition processes from pump-down to switch-off [3]. The AI approach has involved the use of rules and fuzzy logic to mimic the actions of a skilled operator. However, the system is unable to determine for itself the optimum plasma operating conditions. Our current work involves extending the system so that it can explore the parameter space in order to determine the optimum operating conditions. The new system will therefore design the fluxes of species towards surfaces to match the particular process requirements.

Figure 8 shows the control system for low-temperature plasma processes based on DARBS, which is currently under development. It contains a blackboard, which is divided into separate partitions for set-points, measures, commands, and status information. The operator can select process parameters and monitor the process via a graphical user interface. A hardware-driver knowledge source translates the command on the blackboard into suitable signals for the plasma reactor hardware. A timer knowledge source measures the duration of the process and sends a stop command to the blackboard if the maximum process time has been reached. The main control is provided by a rule-based knowledge source. The next step will be to extend the system with a Genetic Algorithm knowledge source.

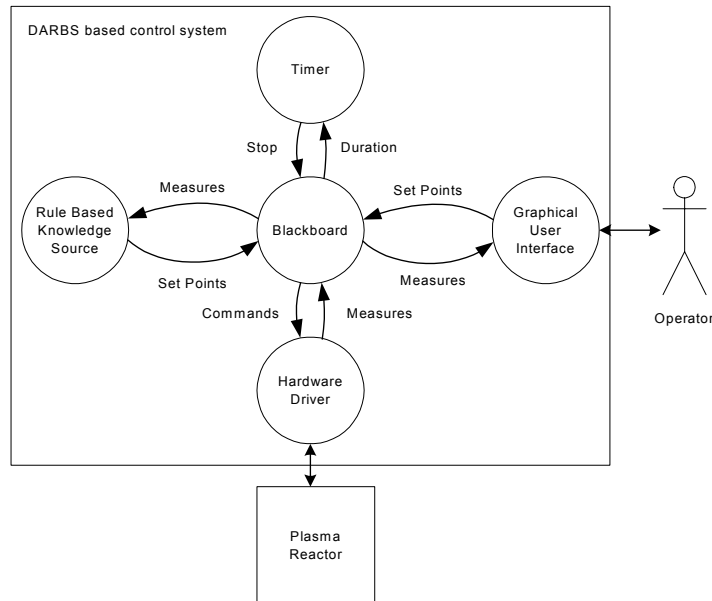


Figure 8 - DARBS-based control system for low-temperature plasma processing.

6 Further Development

DARBS is still in the development phase. The core architecture has been built and tested with simple examples. The results are satisfactory. However, for combating more advanced problems, specialised knowledge sources including neural networks and genetic algorithms need to be built. Initially, DARBS will be run and be tested on a small Intranet. It is anticipated that DARBS will subsequently be operated on the Internet so that knowledge sources developed from different parts of the world can be connected to the central blackboard server.

Currently, the blackboard server and knowledge source clients of DARBS start and terminate manually. It is proposed to develop a DARBS project manager, which will keep track of the project files and the status. It will also launch and terminate the knowledge source clients automatically. A full-featured graphical user interface is also under construction.

7 Conclusion

A blackboard system has been developed with distributed computing features. The project employs client/server technology using TCP/IP, allowing the system to be operated on a LAN, WAN or the Internet. DARBS has been designed to be adaptable so that various kinds of AI approaches can be integrated into the system. Each knowledge source client is equivalent to an agent, with its own specialism. DARBS therefore behaves as a distributed agent-based system, with the proviso that all communication is via the blackboard. The core of DARBS has been built and tested with satisfactory results. To demonstrate the genericity of the system, DARBS is being applied to two different kinds of AI applications, i.e., for automatically interpreting non-destructive evaluation (NDE) data and controlling plasma deposition processes.

8 Acknowledgements

This work was funded by the Open University Strategic Research Initiative and the Engineering and Physical Sciences Research Council (EPSRC) under grant reference GR/M71039/01. The authors are grateful to Mr. Graham Porter of Rolls-Royce for provision of NDT data and advice on its interpretation.

References

1. Hopgood, A.A., Woodcock, N., Hallam, N.J. and Picton, P.D.: Interpreting ultrasonic images using rules, algorithms and neural networks, *European Journal of Non-Destructive Testing*, 2, (1993), pp 135-149
2. Hopgood, A.A.: Rule-based control of a telecommunications network using the blackboard model, *Artificial Intelligence in Engineering*, 9, (1994), pp 29-38
3. Hopgood, A.A., Phillips, H.J., Picton, P.D. and Braithwaite, N.S.: Fuzzy logic in a blackboard system for controlling plasma deposition processes, *Artificial Intelligence in Engineering*, 12 (1997), pp 253-260
4. Engelmores, R.S., Morgan, A.J.: *Blackboard Systems*, Addison-Wesley, (1998), ISBN 0-201-17431-6
5. Hopgood, A.A.: *Intelligent Systems for Engineers and Scientists*, 2nd edition, CRC Press, (2000), ISBN 0-8493-0456-3, Boca Raton, FL
6. Matthew N, Stones R.: *Beginning Linux Programming*, Wrox Press Ltd., (1999), ISBN 1-861002-97-1